


Steam-Flo

Steam-Flo Features Include:

- Redundant safety controls: auto reset pressure switch, manual reset pressure switch, ASME pressure relief valve, pressure gauge, water feeder with level switch, manual reset level switch, check valve, and inlet water screens
- Full steam production within 5-10 minutes of start-up
- Continuous supply of steam
- NEMA 4 electrical enclosure
- Safety Standards: UL-508A/CSA C22.2#14; ASME Section IV, CRN

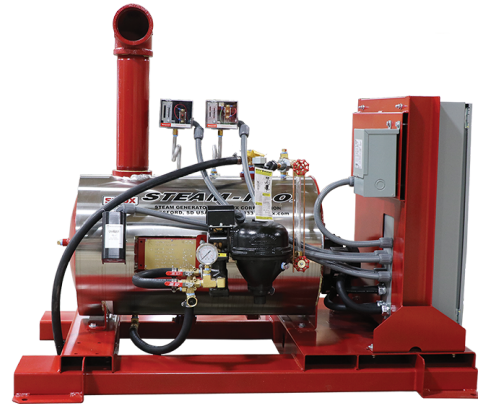

Electrical & Mechanical Information

Voltage	Phase	Hertz	Operating Current Amps
480	3	60	140

Performance

Boiler HP	Heat Input BTU/Hr	Steam Output Lbs/Hr	Max Steam Pressure PSIG	Max Steam Temperature °F
11	389,000	400	15	250

Connections

Water Inlet	Steam Outlet	Fuel Inlet	Flue Size
3/4" Garden Hose	4" NPT	N/A	N/A

Water Supply

Total Boiler Volume	Operating Boiler Volume	Heat Transfer Surface
35 Gallons	27 Gallons	N/A

Fuel Supply

Fuel Type	Fuel Usage
N/A	N/A

Weight & Dimensions

Length		Width		Height	
in	mm	in	mm	in	mm
58	1,473	26	660	50	1,266
Weight			700 (lbs), 318 (kgs)		

For More Info Visit sioux.com

Sioux Corporation, Copyright 2021 - Subject to change without notice